

PK 110002 SH

PALFINGER

LIFETIME EXCELLENCE


PERFECT INTERACTION BETWEEN ELECTRONICS AND HYDRAULICS IS A GUARANTOR FOR MAXIMUM PERFORMANCE.




PK 110002 SH

HIGH PERFORMANCE



G

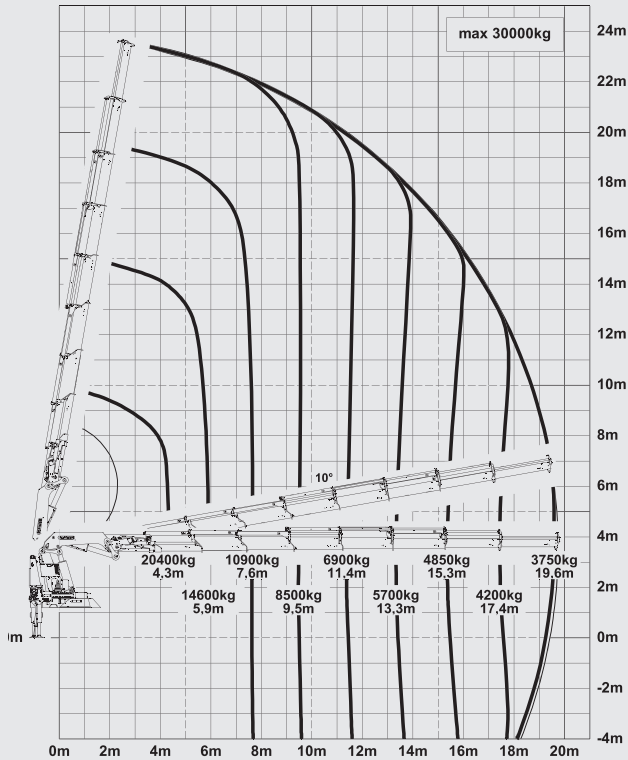


H

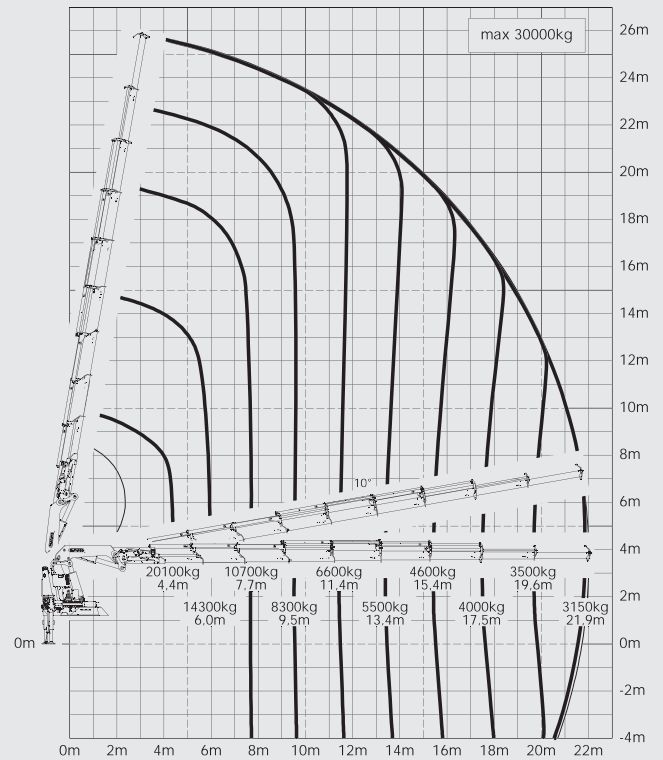


DIMENSIONS

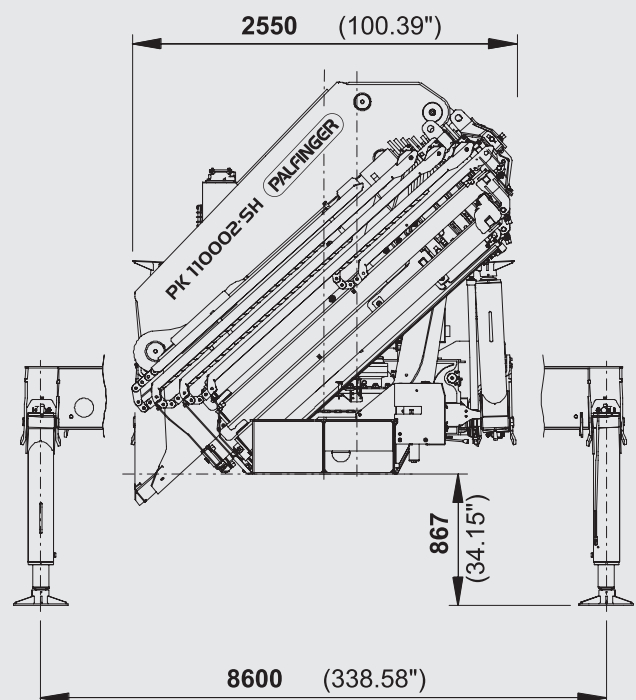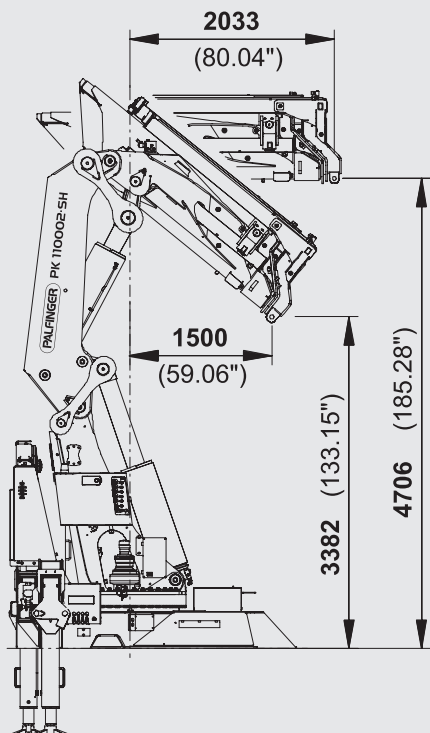

G PJ170E JV1 DPS PLUS

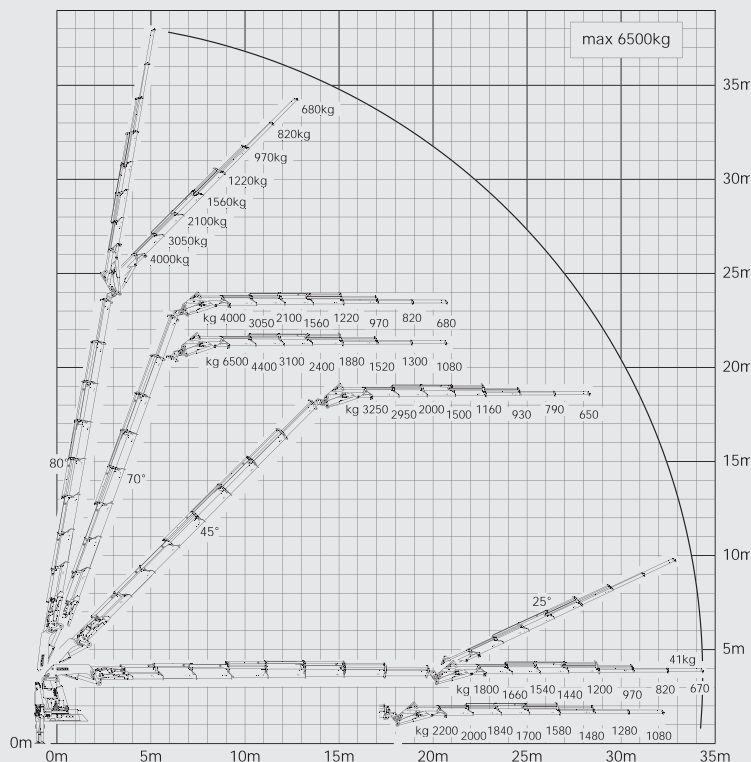

- More lifting power due to S-HPLS
- More efficient and faster due to continuous slewing system
- Additional applications due to Power Link Plus
- Maximum utilisation of the working range due to HPSC
- More power and outreach due to DPS-Plus

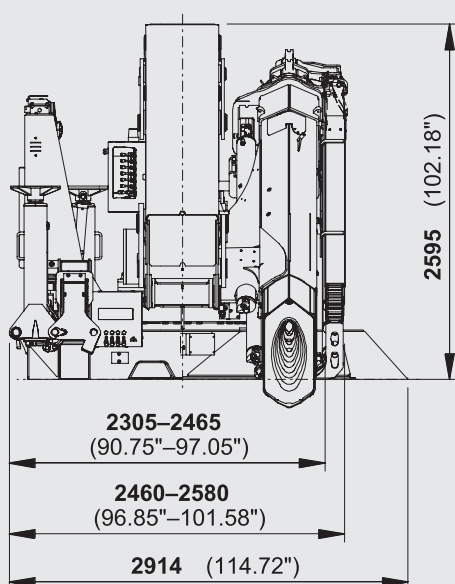

TECHNICAL SPECIFICATIONS (EN 12999 HC1 HD5/B3)

Max. lifting moment	98.5 mt/965.9 kNm	712440 ft.lbs.
Max. lifting capacity	30000 kg/294.3 kN	66140 lbs.
Max. hydraulic outreach	22.0 m	72' 2"
Max. manual outreach	27.1 m	88' 11"
Max. outreach (with fly jib)	34.3 m	112' 6"
Slewing angle	endlos	
Slewing torque	9.0 mt/88.3 kNm	65100 ft.lbs.
Stabilizer spread	standard 8.6 m	standard 28' 3"
Fitting space required (std.)	2.31 m	7' 7"
Width folded	2.55 m	8' 4"
Max. operating pressure	365 bar	5293 psi
Recommended pump capacity	from 110 l/min	24.2 US gal./min
	to 130 l/min	28.6 US gal./min
Dead weight (std.)	8825 kg	19460 lbs



* Optional features / country-specific equipment

PALFINGER LOADER CRANES ARE CONVINCING DUE TO THEIR SUPERIOR LIFE-CYCLE PERFORMANCE. THEY ARE THE MOST ECONOMICAL AND ALSO THE MOST RELIABLE OVER THE ENTIRE PRODUCT LIFE. FROM SOLUTION FINDING TO RESALE.

➤ **BETTER SOLUTIONS**

➤ **HIGHER VALUE RETENTION**

➤ **BETTER EFFICIENCY**

➤ **BETTER ECOLOGY**



➤ **BETTER ERGONOMICS**

LIFETIME EXCELLENCE

➤ **HIGHER SERVICEABILITY**

➤ **HIGHER AVAILABILITY**

➤ **MORE RELIABILITY**

For further information please visit: www.palfinger.com/thebrand